




PCoIP Zero Client Monitor

CP19BH

**19" Cloud Monitor
with Optional Touchscreen**

GVISION Cloud Monitors with optional touchscreens utilize Teradici's® PCoIP® chipset and VMware View™ software to deliver superior end user experience and functionality. GVISION provides the highest performance for touchscreen applications through precise calibration and tactile responsiveness. Designed for industrial and commercial use, GVISION Cloud Monitors with optional touchscreens can be easily integrated into a multitude of solutions.

- Better IT Management
- True Zero Client Simplicity
- Less Power Consumption
- Increased Cost Savings

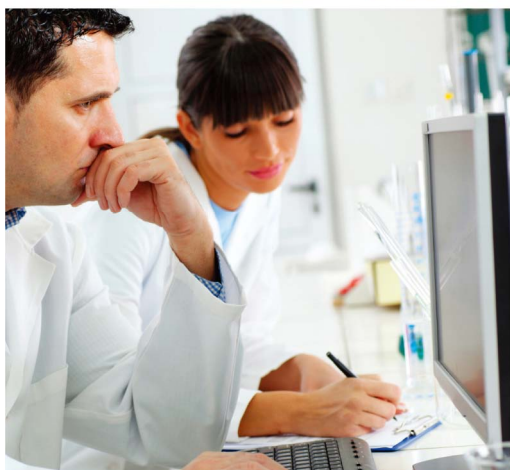

Features

- The GVISION CP19BH utilizes a PCoIP® (PC-over-IP) chipset and VMware View software to deliver a powerful and secure virtual computing solution
- High contrast color TFT LCD display supports resolutions up to 1280 x1024.
- Advanced OSD control for picture quality adjustment
- VESA mounting
- RoHS Compliance
- Stateless zero client, no data storage
- Server-based remote imaging
- WAN optimizations built into the protocol



For more information please contact

Tel:+886-2-2264-1991 | Fax:+886-2-2264-7535 | www.GVISION.com.tw

Where Versatility Meets Flexibility





PCoIP Zero Client Monitor

CP19BH

19" Cloud Monitor
with Optional Touchscreen

LCD Display:	19" TFT active matrix panel
Pixel Pitch:	0.294 (H) x 0.294 (V) mm
Max. Resolution:	SXGA 1280 x 1024
Contrast Ratio:	1000:1 (Typ.) w/o sensor or glass
Brightness:	400 cd/m ² (Typ.) w/o sensor or glass
Response Time (Tr+Tf):	5 ms (Typ.)
Display Color:	16.7M
Effective Display Area:	376.4 (H) x 301.1 (V) mm
Viewing Angle (CR≥10):	170°(H) x 160°(V) (Typ.) w/o sensor or glass
Lamp Life (hr) / Backlight:	50,000 (Typ.) / CCFL
Stand Base:	Tilt down : -5° , Tilt up : +90°
System:	PCoIP Processor Operating System: None

I/O

Video in:	DVI x 1, up to 1920 x 1200
Audio System:	Headphone Out x 1 Microphone In x 1 Speaker
Ethernet:	RJ45 x 1 / WiFi by USB dongle
USB 1.1:	4 ports

Touch sensor:	By Model
Key Control:	Power on/off, with LED, Menu, Select, Adjustment (+,-)
Power:	Power Adapter DC 12V / 5A
Operating Condition: Temperature	0°C - 40°C (32°F - 104°F)
Humidity	10% - 90% (no condensation)
Altitude	To 10,000 feet
Storage Condition: Temperature	-20°C - 60°C (-4°F - 140°F)
Humidity	10% - 90% (no condensation)
Dimensions (WxHxD):	392.0 x 381.5 x 180.0 mm
Carton Dimensions (WxHxD):	452.0 x 461.0 x 228.0 mm

* Specifications are subject to change



Optional Accessories

- Optional front panel sealed to resist dust and splashes.
 - AG / AR tempered glass : IP54
 - Resistive / Capacitive Touch Panel : IP54
- Anti-Glare / Anti-Reflective tempered glass
- Resistive, surface acoustic wave, surface capacitive, projected capacitive and infrared touch solutions
- Choice of black , beige or white housing
- Cable Management Stand
- USB 2.0 Hub

MECHANICAL DRAWING

I / O PORT

Unit : mm

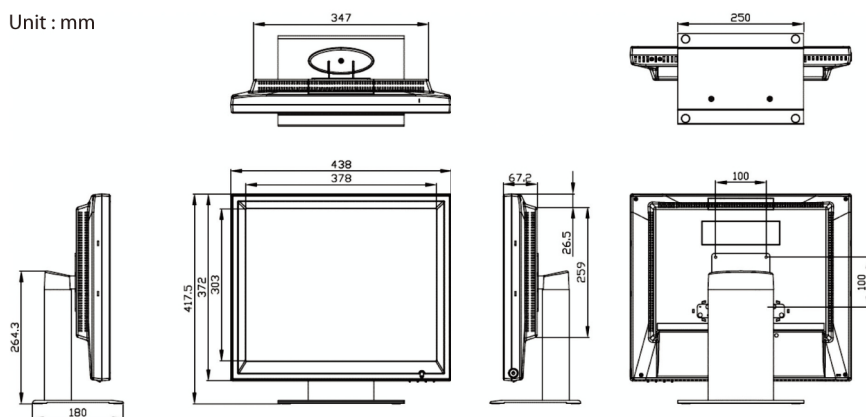

© Copyright 2012 GVISION Inc. USA, Inc. All Rights Reserved. PCoIP and PC-over-IP are registered trademarks of Teradici Corporation in the United States and/or other countries.

Where Versatility Meets Flexibility

