



GVISION's K17TH is a 17" Kiosk solution that can be integrated into a wide variety of applications. The K17TH provides a truly customizable solution which allows for easy integration of anti-dust/anti-spill proof IP54 glass. The metal chassis with brackets makes this monitor easy to mount into any enclosure: point of information, interactive maps, self-service, self-check-in or ATMs. Touch technology can be customized for your projects.

- Commercial design
- Durable chasses and brackets
- IP54 option

For more information please contact

Tel:+886-2-2264-1991 | Fax:+886-2-2264-7535 | www.GVISION.com.tw

PARAMETER		SPECIFICATION	
LCD Display		17" TFT active matrix panel	
Pixel Pitch		0.264 (H) x 0.264 (V) mm	
Max. Resolution		SVGA 1280 x 1024	
Contrast Ratio		1000:1 (Typ.)	w/o sensor or glass
Brightness		350 cd/m ² (Typ.)	w/o sensor or glass
Response Time (Tr+Tf)		5 ms (Typ.)	
Display Color		16.7M	
Effective Display Area		337.9 (H) x 270.3 (V) mm	
Viewing Angle (CR≥10)		170°(H) x 160°(V) (Typ.)	w/o sensor or glass
Lamp Life (hr) / Backlight		50,000 (Min.) / CCFL	
Input Signals		Analog, Digital	
Signal Connector	Analog Digital	D-Sub15 pin (VGA) DVI-D	
Scan Frequency		60 ~ 75 Hz	
Touch Panel		5-wire Resistive	
Touch Interface		RS-232 or USB A type	
Key Control		Power on/off with LED, Menu, Select, Adjustment (+, -)	
Power		Universal Power Adapter Input AC 100 ~ 240V, 50 ~ 60 Hz Output DC 12V / 4A, 48W	
Operating	Temperature Humidity Altitude	0°C ~ 40°C (32°F ~ 104°F) 10% ~ 90% (no condensation) To 10,000 feet	
Storage	Temperature Humidity	-20°C ~ 60°C (-4°F ~ 140°F) 10% ~ 90% (no condensation)	
Dimensions (WxHxD)		C Type : 412.0 x 340.0 x 57.0 mm F Type : 409.5 x 337.5 x 51.0 mm	
Carton Dimensions (WxHxD)		530.0 x 500.0 x 230.0 mm	
Weight (Net)		7.2 kg	
Certification		CE/FCC/UL	


FEATURES

- High contrast color TFT LCD display supports resolution up to 800 x 600
- Compatible with VGA, IBM and VESA signal standards (resolution/timing auto-detected)
- Compatible with non-standard signals (on request)
- Supports DDC 1/2B for Plug & Play compatibility
- Advanced OSD control for picture quality adjustment
- Rugged all-metal fully enclosed chassis
- VESA standard mounting
- RoHS/WEEE Compliance

OPTIONS

- Anti-Glare / Anti-Reflective tempered glass
- Sunlight Readable
- IP54 waterproof & dustproof sealed front bezel
- Touch sensor technologies: resistive, surface capacitive, projective capacitive, SAW, IR
- Video Signal input
 - Signal Connector: RCA / S-Video
 - NTSC / PAL / SECAM video

I/O PORTS

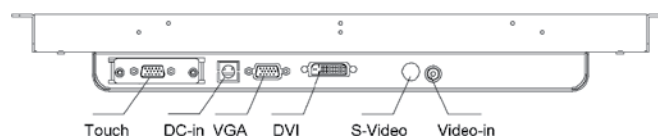


* Specifications are subject to change without notice.

MECHANICAL DRAWING

Unit : mm

C Type Chassis

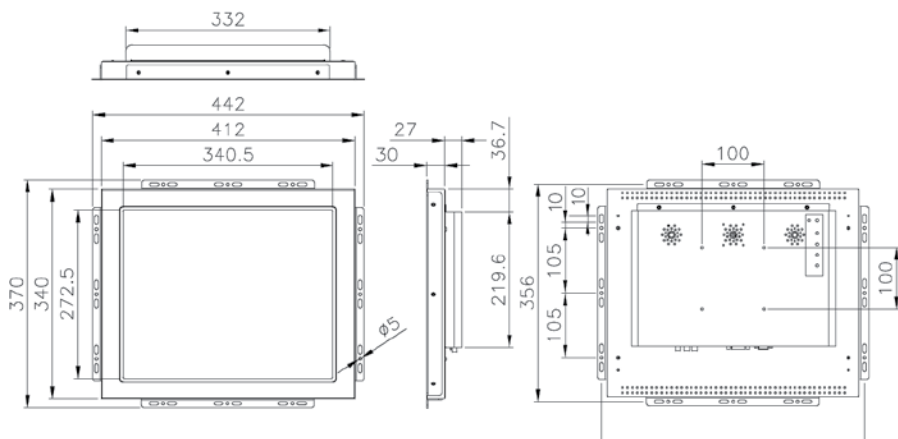

F Type
Open Frame

